




## 2 JKL series manual control double-drum fast slides winch

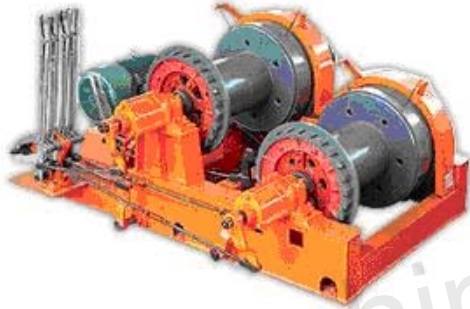

This machine mainly used for plump hoisting heavy cargos which are in construction building site, factory of mining area and dock. Especially suitable for punching and piling working of bridge, dock, construction foundation works. The main features are double canister wind, can meet the requirement of hoisting hammer, drag for sand and grouting

### Technical data:

Model	Line pull (KN)	Rope speed (M/min)	Rope Dia (mm)	Drum capacity (M)	Motor		Dimension			Total weight (KG)
					Model	Power (KW)	Length	Width	Height	
2JKL 2	20	30	12.5	150	Y180L-6	15	1850	1650	1350	1950
2JKL 3	30	30	15.5	200	Y200L-6	22	2550	1740	1380	3000
2JKL 5	50	30	21.5	250	Y225S-6	37	2960	2100	1700	5000
2JKL 8	80	36	26	250	Y280S-6	55	3800	2500	1950	8000
2JKL 10	100	29	28	250	Y280M-6	75	3925	2540	1950	8800
2JKL 15	150	29	37	250	Y315S-6	90	4510	2550	2300	13000

### Note:

Above mentioned based on 380 Voltage, 50 Hz, 3-Phase, and the price not include wire and certificate, if any want please in advice.