




JKLA manual control fast speed winch

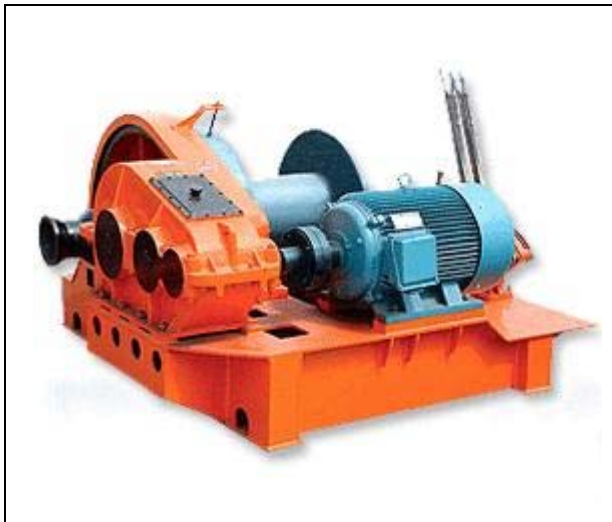

This machine is mainly used for hoisting heavy cargos which are in the place of construction building site, main factory, and dock. Especially suitable for punching and piling working of bridge, dock, construction foundation works. The main feature is circumvented by the principal axis.

Technical data:

Model	Line pull (KN)	Rope speed (M/min)	Rope Dia (mm)	Drum capacity (M)	Motor		Dimension			Total weight (KG)
					Model	Power (KW)	Length	Width	Height	
JKL5A	50	30	21.5	250	Y225S-6	37	2300	1900	1650	3000
JKL6A	60	30	24	250	Y280S-6	45	2350	1900	1650	3200
JKL8A	80	29	26	250	Y280M-6	55	2440	2500	1800	5500
JKL10A	100	29	28	250	Y315S-6	75	2590	2540	1800	5800
JKL12.5	125	28	34	250	Y315S-6	75	3400	2610	2100	8650
JKL15	150	28	37	250	Y315M-6	90	3080	2550	2100	8100

Note:

Above mentioned based on 380 Voltage, 50 Hz, 3-Phase, and the price not include wire and certificate, if any want please in advice.